


Zettex Strongbond

Technical documentation

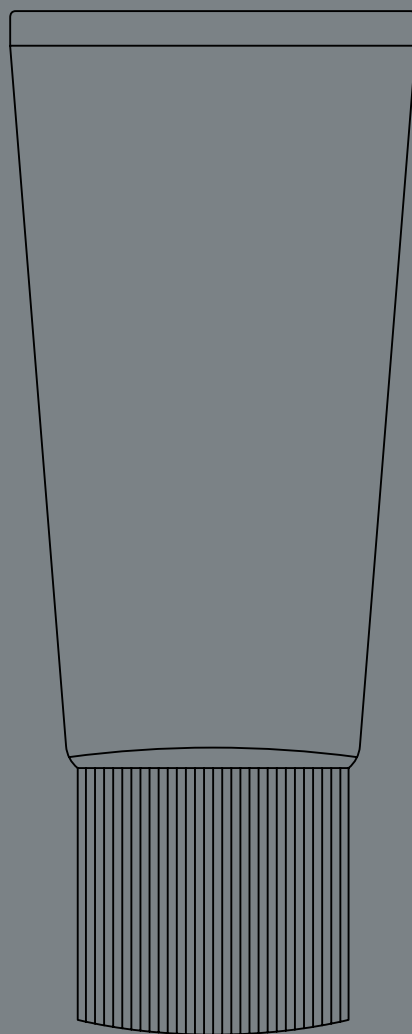

Specifications

FritsJurgens uses a polymer adhesive: the Zettex Strongbond MS 80. This is an elastic permanent adhesive.

Product description

Zettex MS Polymer 80 is a universal adhesive for bonding the most common materials except PE and PP. Zettex MS Polymer 80 can be applied to almost any surface; is extremely strong and flexible. Thanks to the excellent polymer technology, the MS 80 can withstand a tensile strength of 4.5 N/mm².

Processing

Zettex MS Polymer 80 is for bonding all metals, types of wood, stone, concrete and natural stone. After installing the door, it is recommended to allow adhesive to cure for 24 hours in a door position where it is not used.

Delivery form	Tube 25 ml
Colour	Black
Hardness	80 Shore A
Hardening	4 mm per 24 hours
Processing temperature	+5°C to +40°C
Elongation to Break	350%
Viscosity	100 mPa·s
Density (g/ml)	1.70
Temperature resistance	-40°C to +90°C
Tensile strength	4.5 N/mm ²

FritsJurgens International

A. Einsteinlaan 1
9615 TE Kolham
The Netherlands
+31 598 343 410
info@fritsjurgens.com

FritsJurgens Middle East & Asia

Building A3 Unit 516/517
Dubai South
Dubai
United Arab Emirates
+971 4 575 8493
dubai@fritsjurgens.com

FritsJurgens North America

228 East 45th Street, Suite 9E
New York, NY 10017
United States
+1 800 597 4961
northamerica@fritsjurgens.com

fritsjurgens.com

FritsJurgens®