


System One Slim



Profile preparation and mounting manual

FritsJurgens Set - Slim - Class C





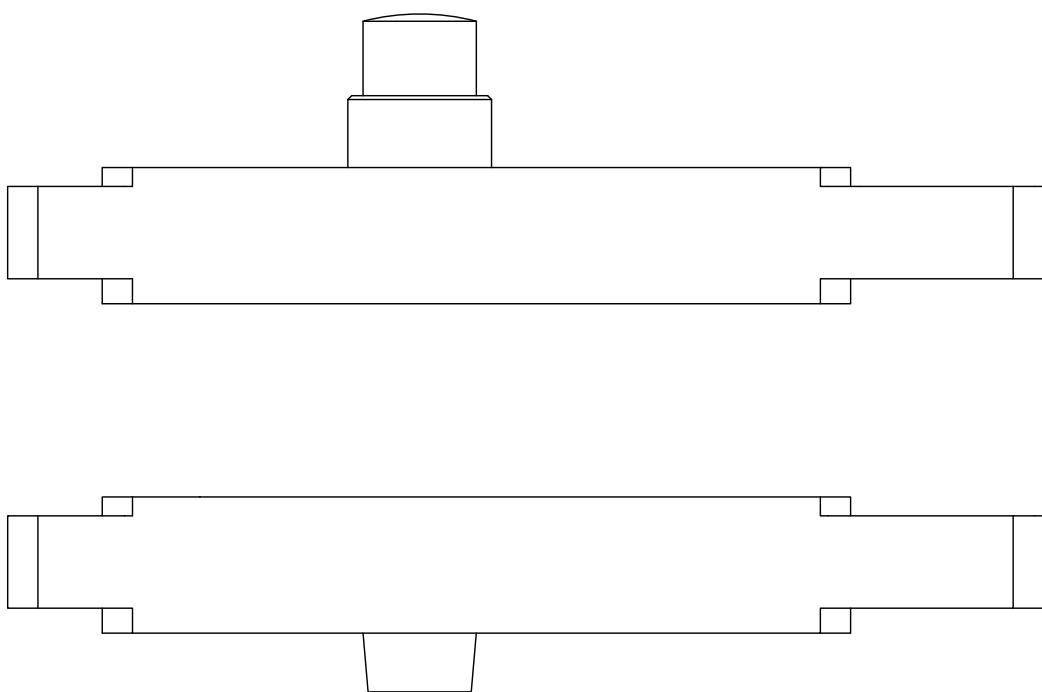



Cleaning and maintenance

  Clean with a damp cloth and mild soap	 No aggressive cleaning products as they may cause corrosion	 The hinges don't need any maintenance or oiling
---	--	--




Glue

  Use provided FritsJurgens glue	  Use permanent elastic glue only
--	--

Closing force


 	 	 
Draught seals, drop seals and latches may affect the last part of the closing movement; this is where a lot of closing force is required.		

Top gap

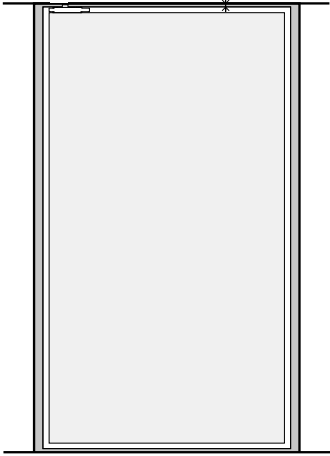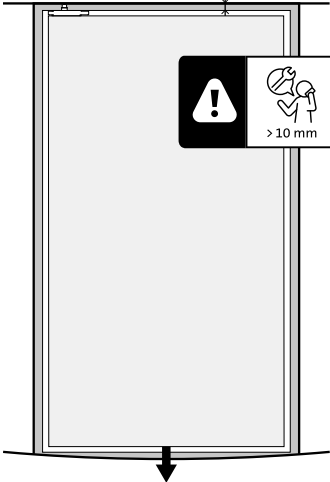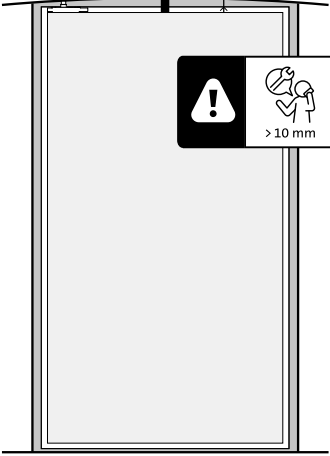  4 - 10 mm Ensure sufficient cover of top pivot pin in ceiling plate: 4–10 mm	  ⊗ > 10 mm ⚠ > 10 mm Beware of sagging floor: ensure top gap remains 4–10 mm	  ⊗ > 10 mm ⚠ > 10 mm Beware of flex ceiling: ensure top gap remains 4–10 mm
---	---	--




Make sure your door specification
meets the FritsJurgens product class.

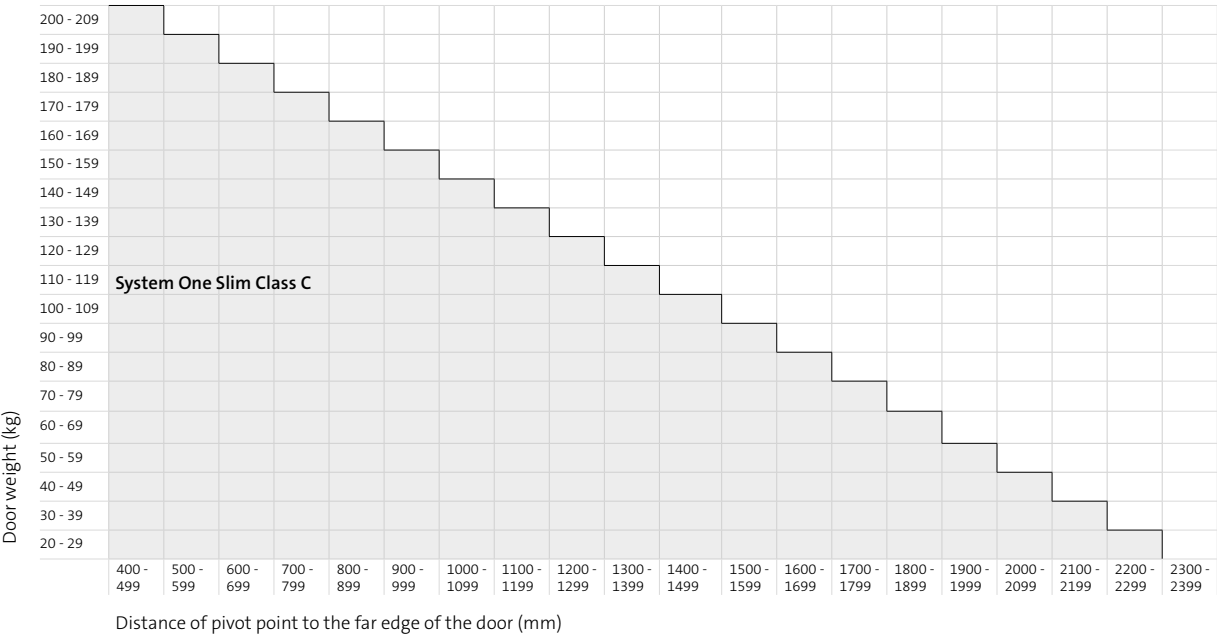


1 Set overview

5

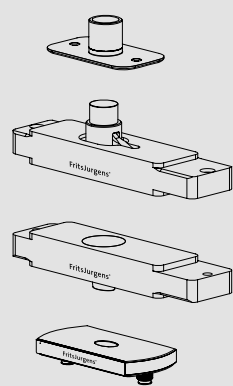


2 Profile preparation

7

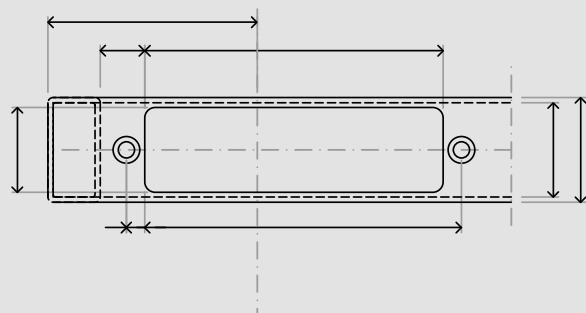


3 Mounting instructions

13

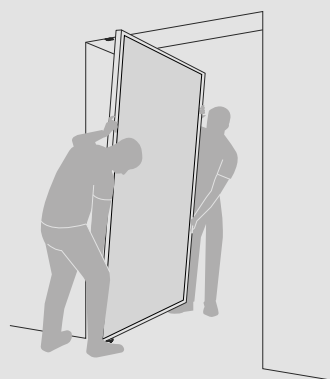


4 Disassembly instructions

30




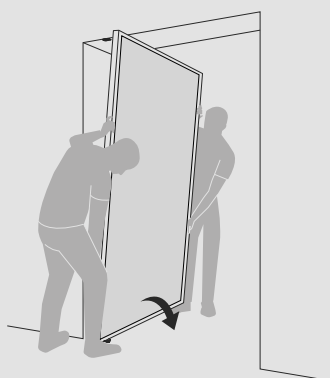


1 Set overview

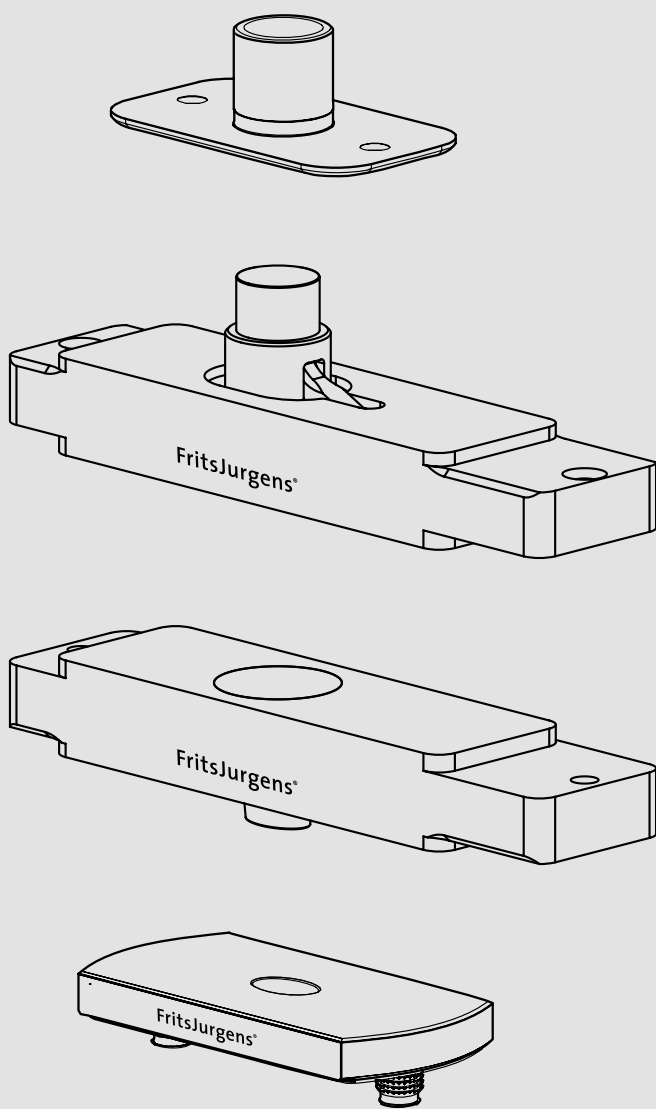


Set overview

Class C

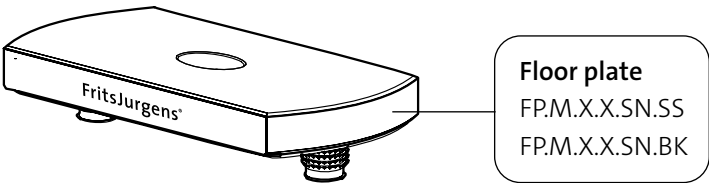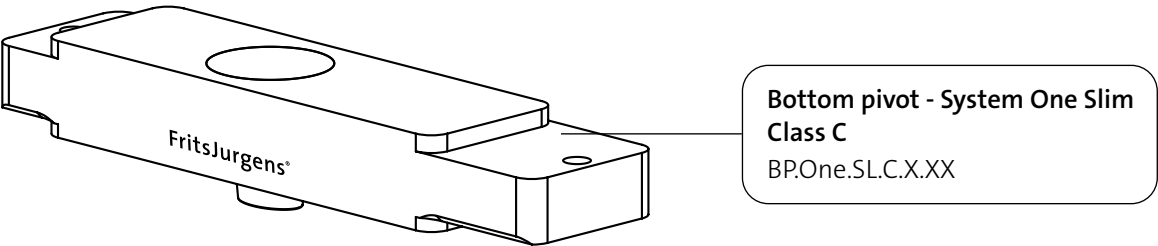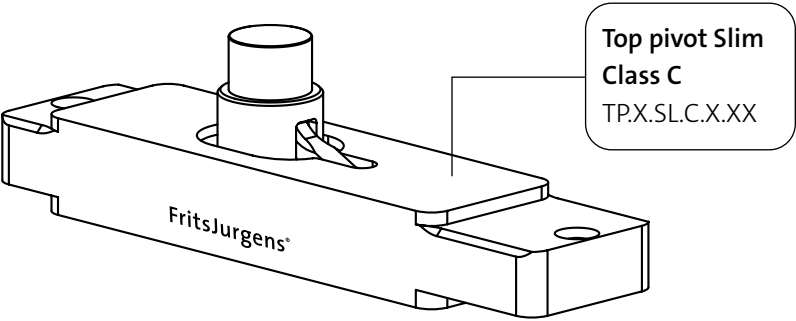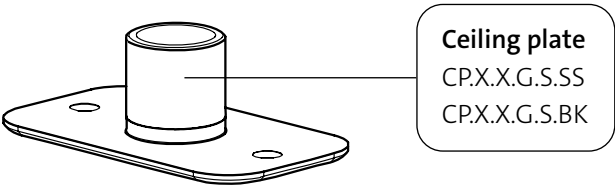


2 Profile preparation

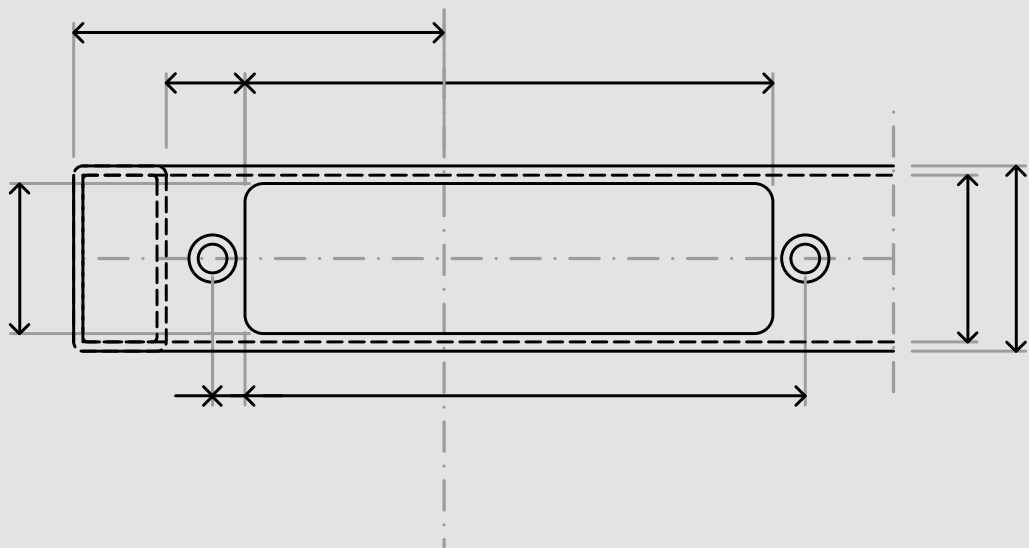


Bottom pivot
Class C

BP.One.SL.C.X.XX

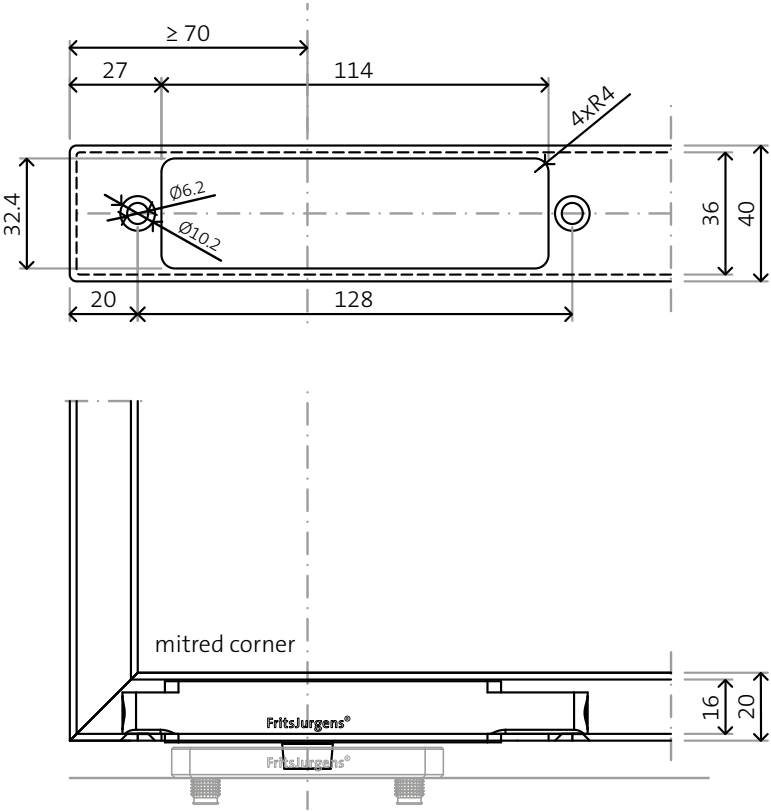


 For profile with mitred corner

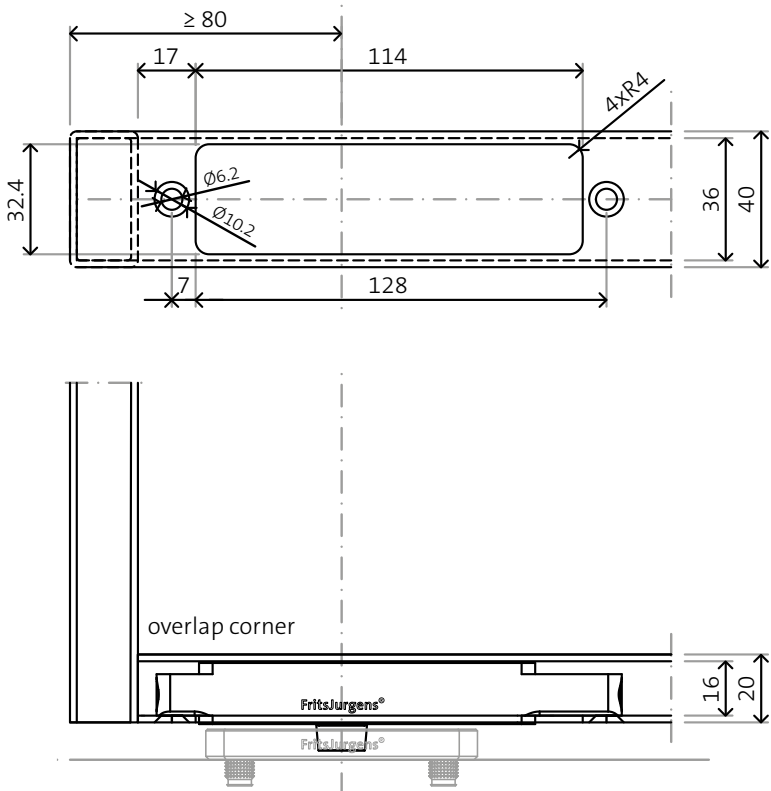

 For profile with overlap corner



Bottom pivot
Class C

BP.One.SL.C.X.XX


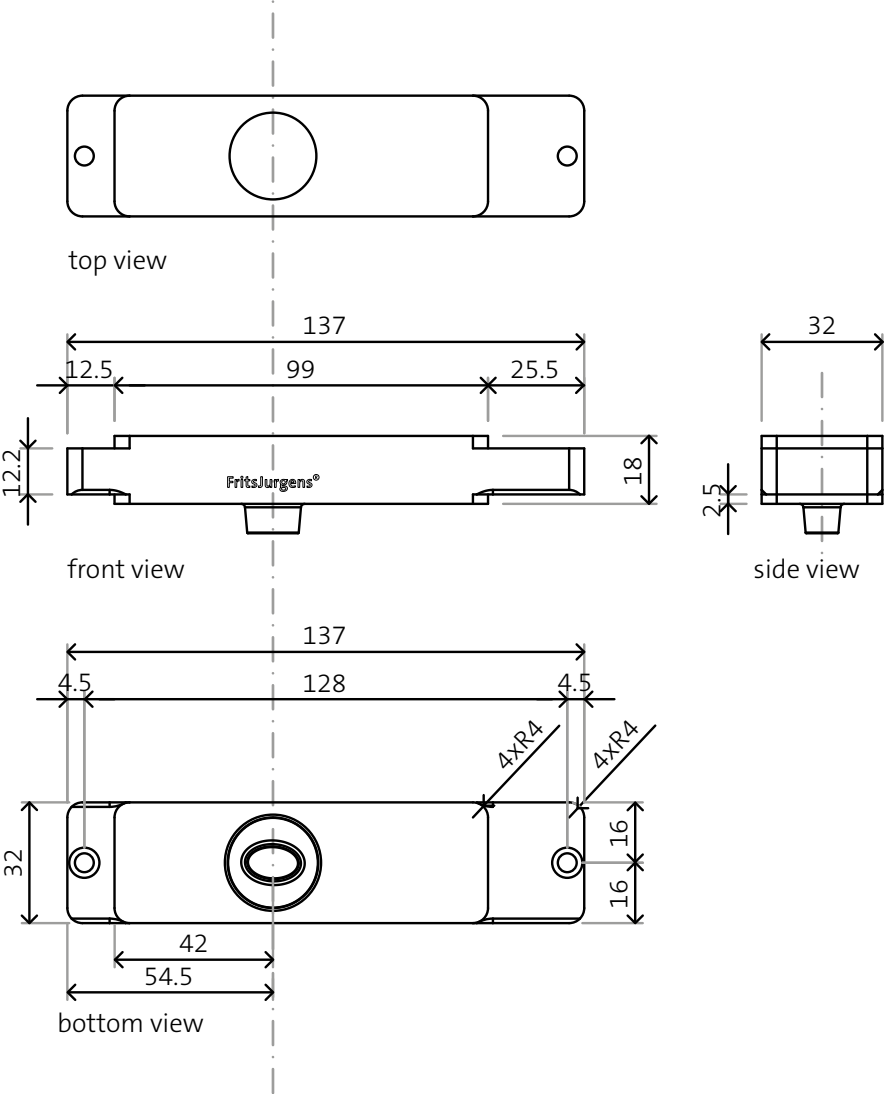


Top pivot
Class C

TPX.SL.C.X.XX

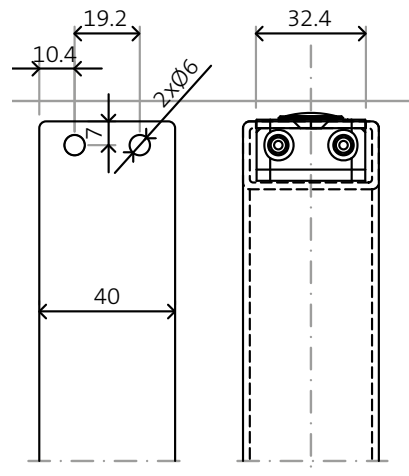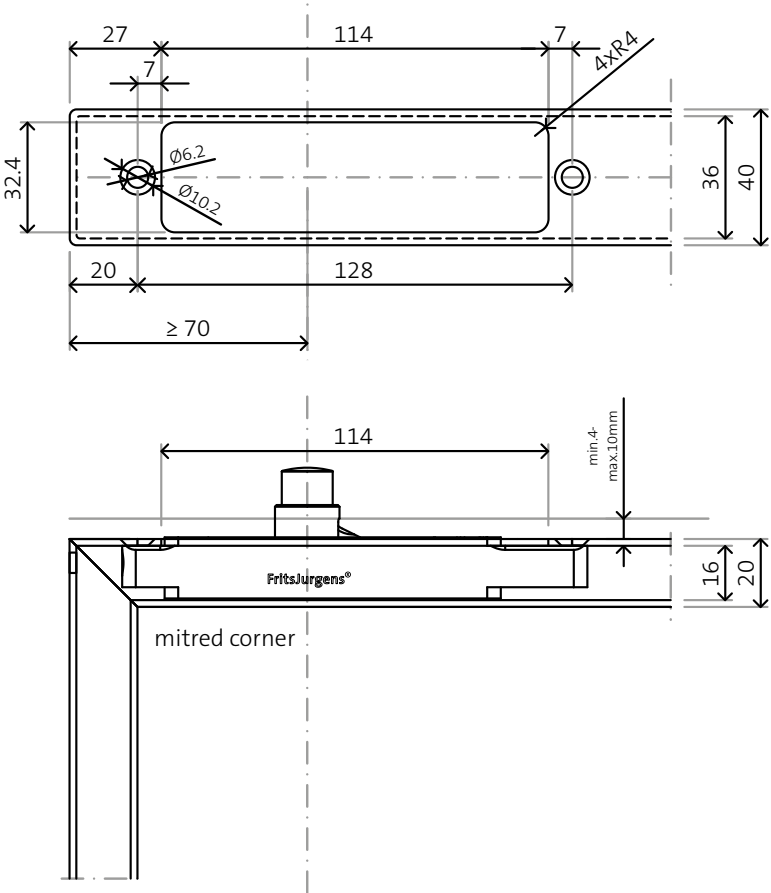

 For profile with mitred corner

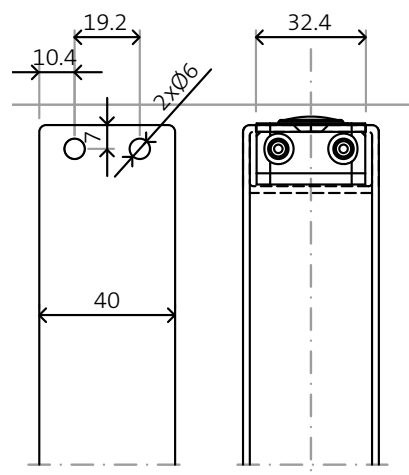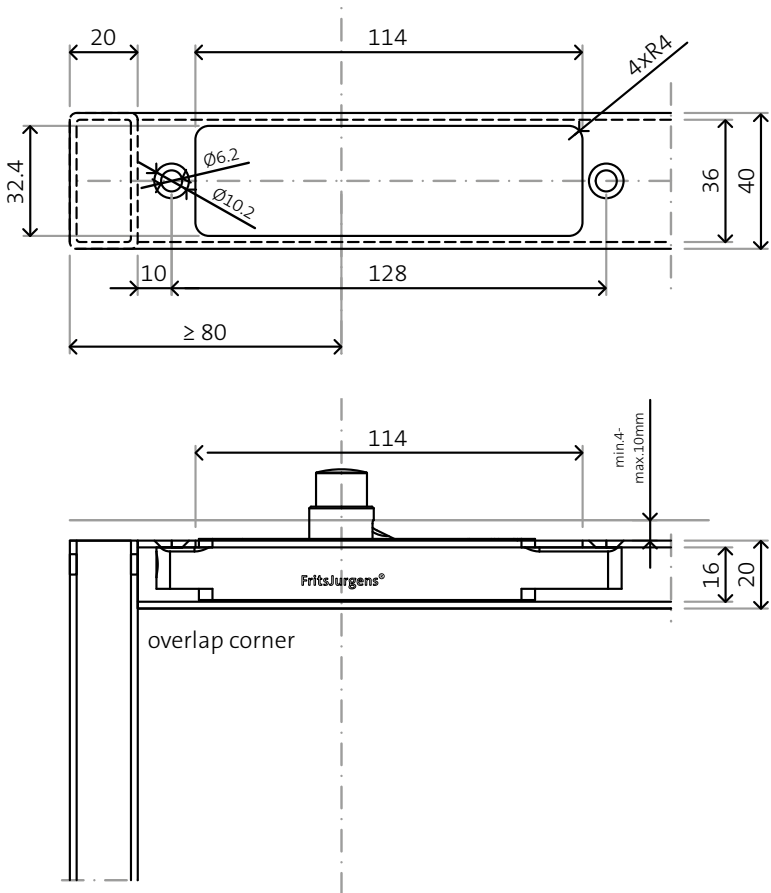





 For profile with overlap corner

TP.X.SL.C.X.XX





Floor plate squared – Non-adjustable

FP.M.X.X.SN.SS
FP.M.X.X.SN.BK

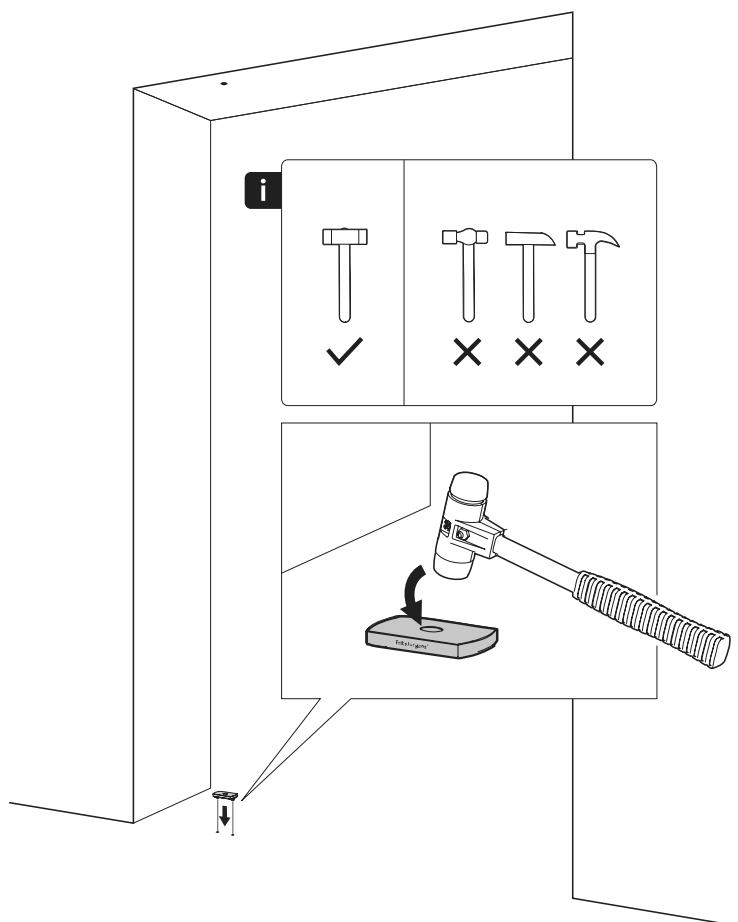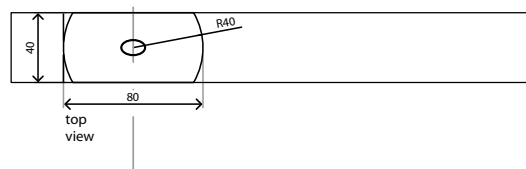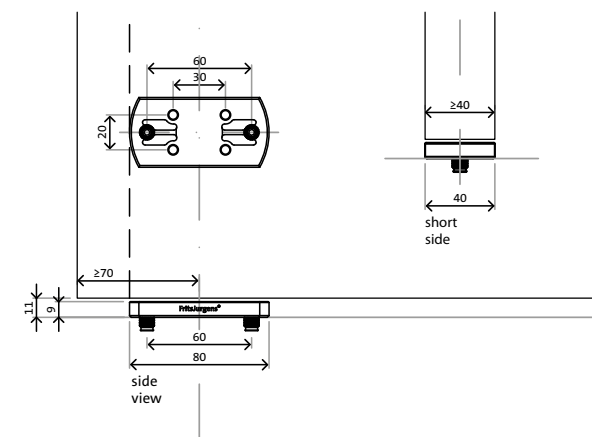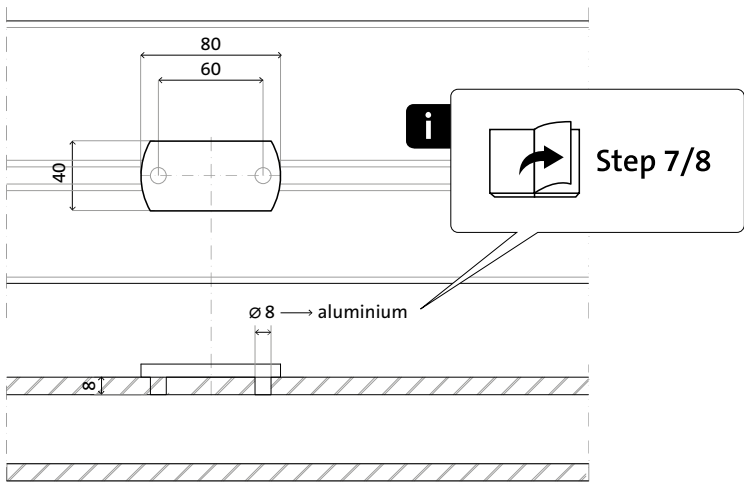

3 Mounting instructions

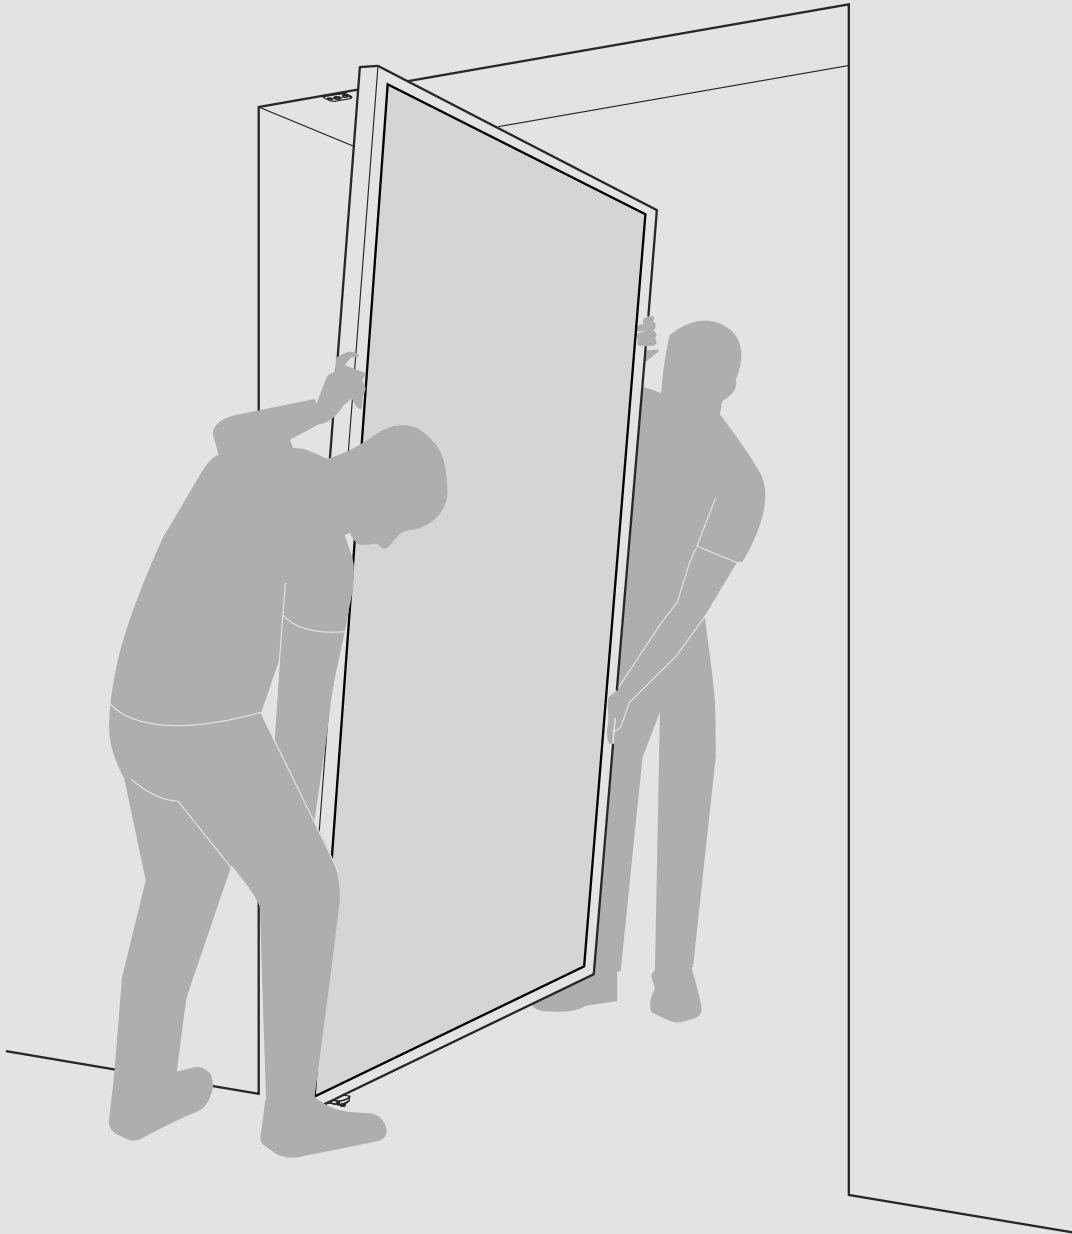


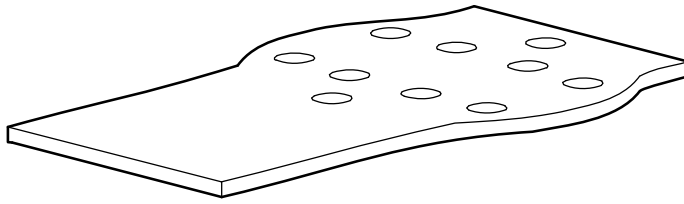

FJ.MT.DT.M



FJ.MT.ZS

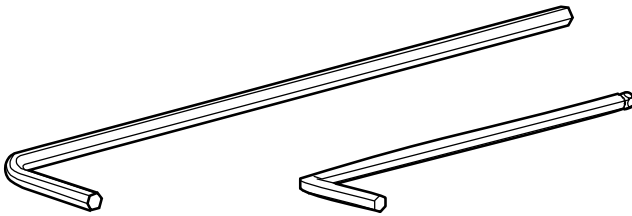

FJ.MT.AK5x24

FJ.MT.AK3



2x FJ.FP.Pe.30



2x FJ.FP.Pe.8



4x FJ.Tx.4.0X50.PKDD




FJ.Bit.Tx20




4x FJ.Tx.M6x16.ISO14581




FJ.Bit.Tx30

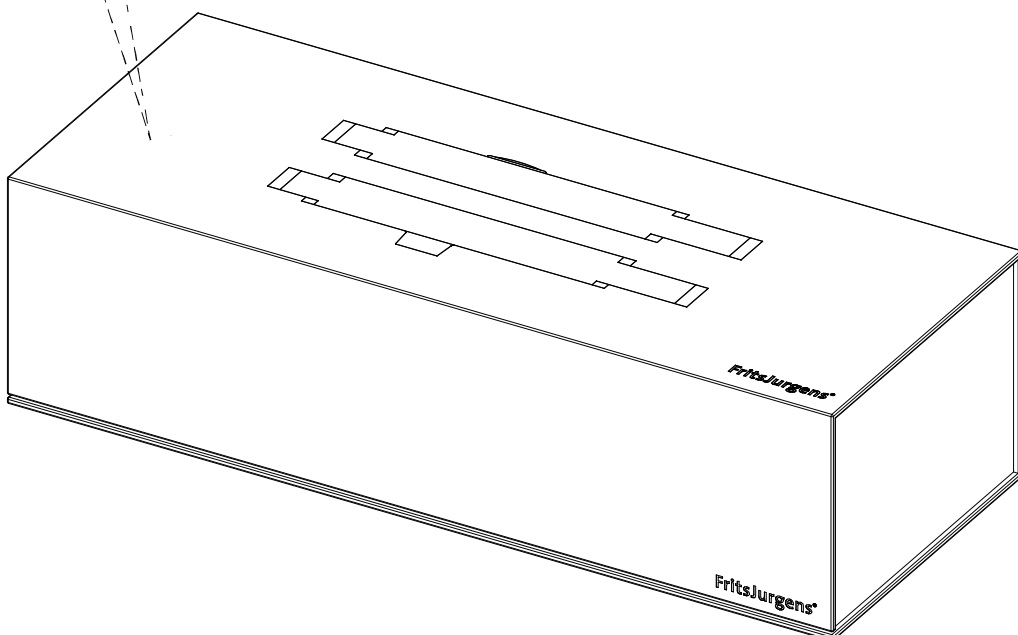

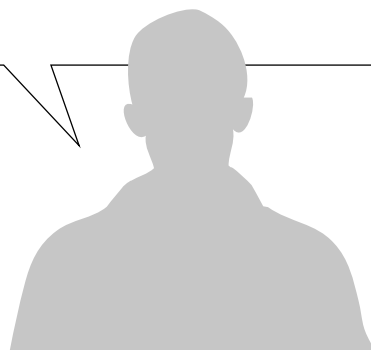


Fitting bottom pivot


1

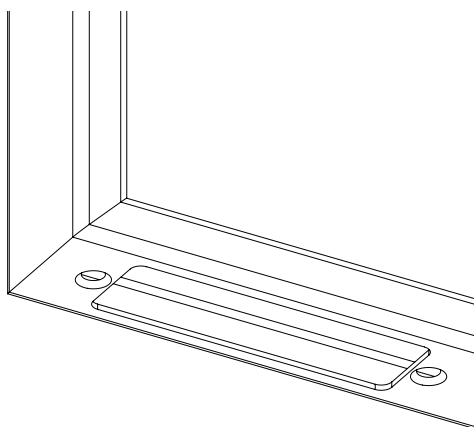


2

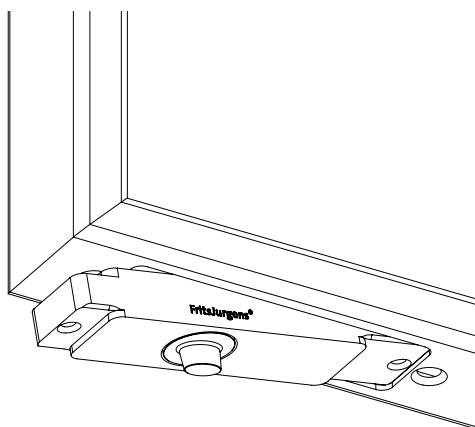


3

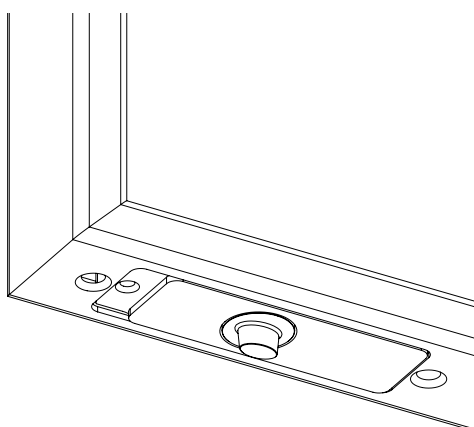

4

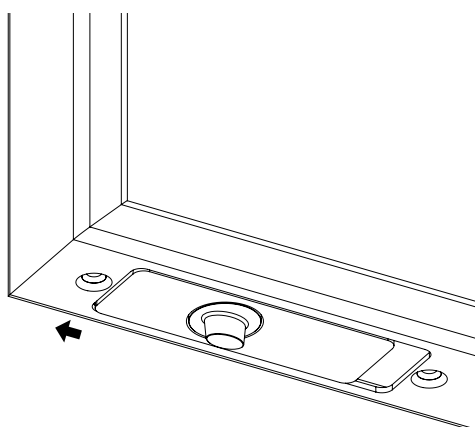


5

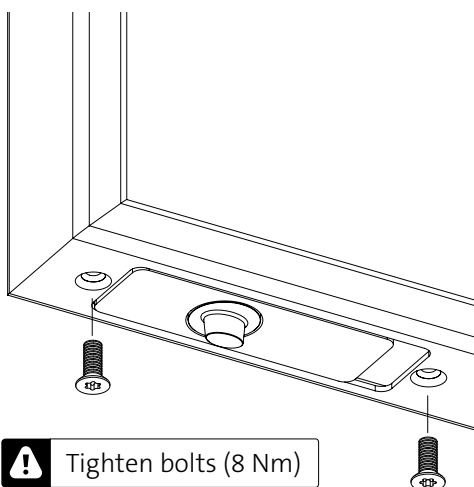


 Tighten bolts (8 Nm)

6

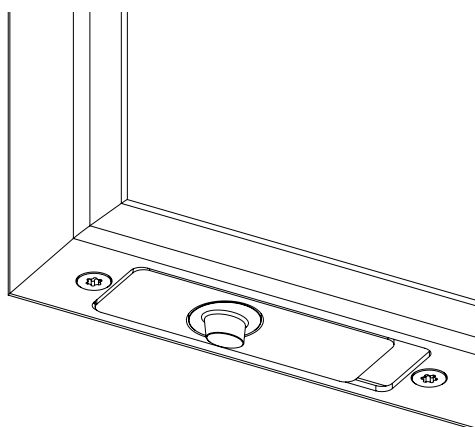


Fitting top pivot


1

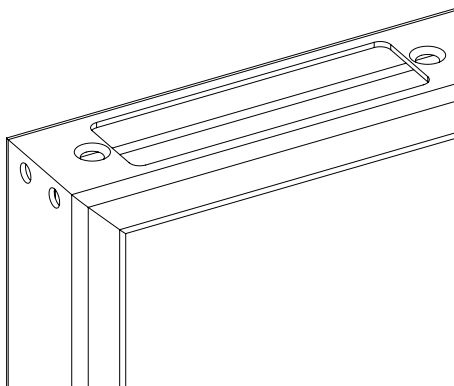


2

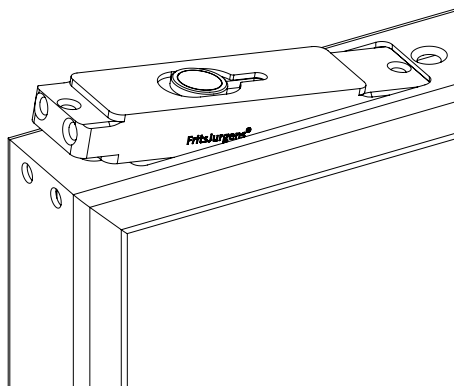

3

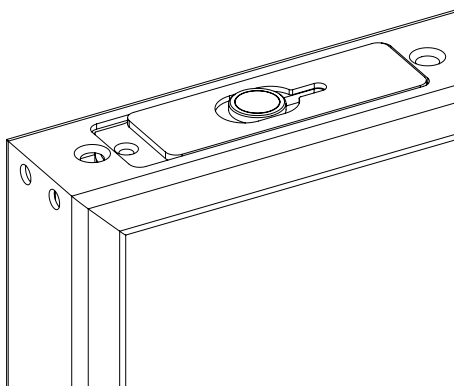


4

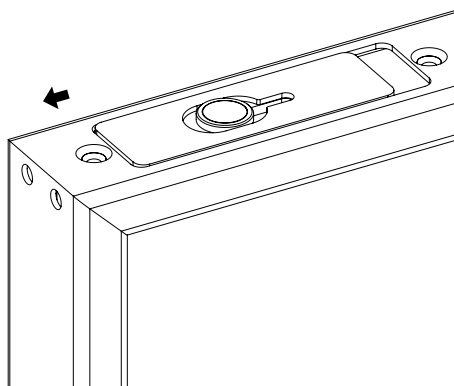


5


 Tighten bolts (8 Nm)

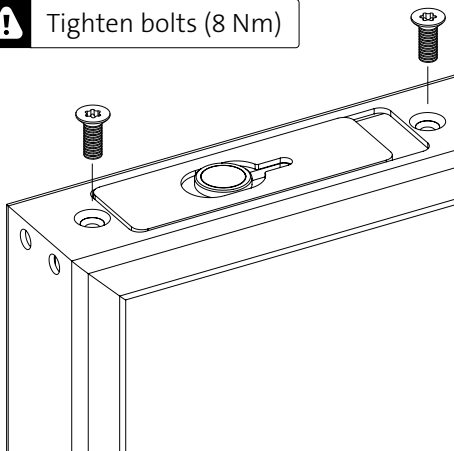


6

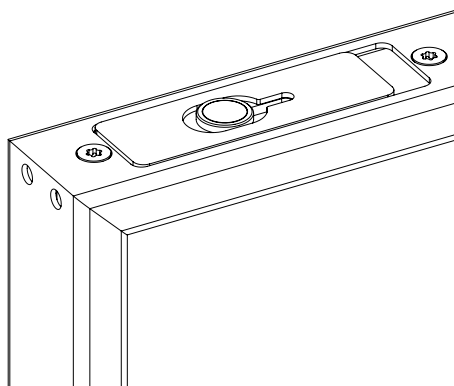

1

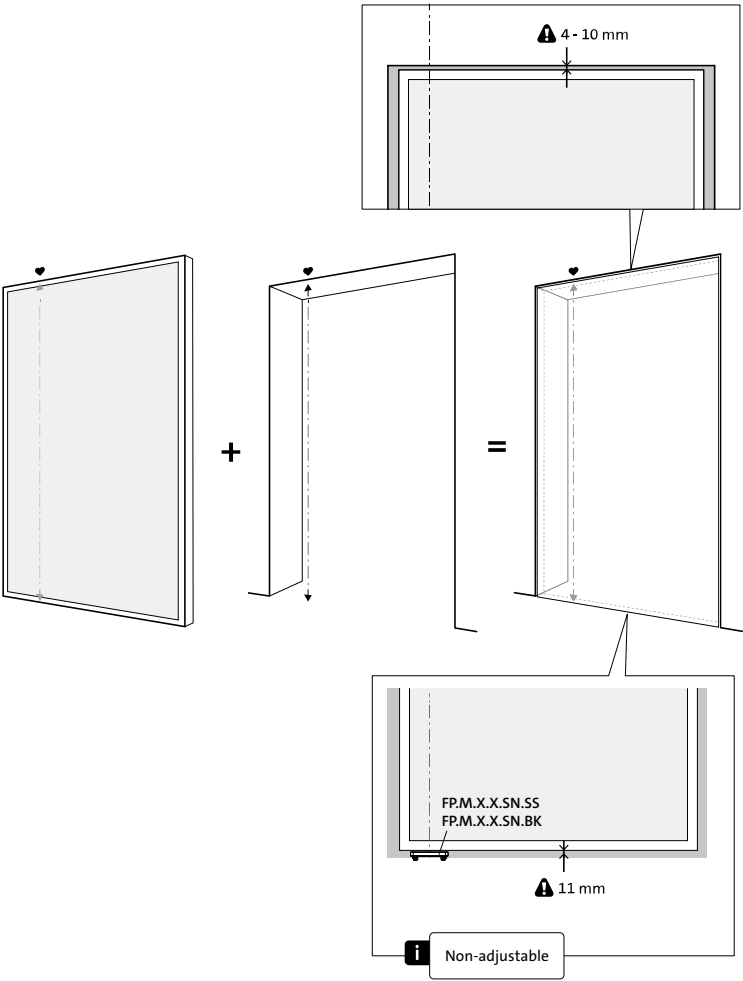

2

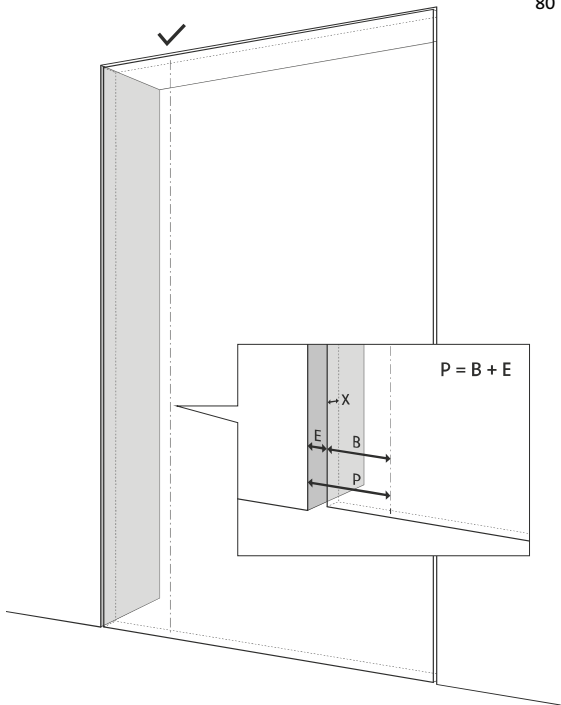

B - Distance pivot point to door edge (mm)


	70	100	250	500	1000	1500	2000
40	5	4	3	2	2	2	2
50	6	5	3	3	2	2	2
60	8	6	4	3	2	2	2
70	10	8	4	3	3	2	2
80	13	10	5	4	3	3	2

E



E - Seam to be maintained on the pivot side (mm)

fritsjurgens.com/gap-calculator


3

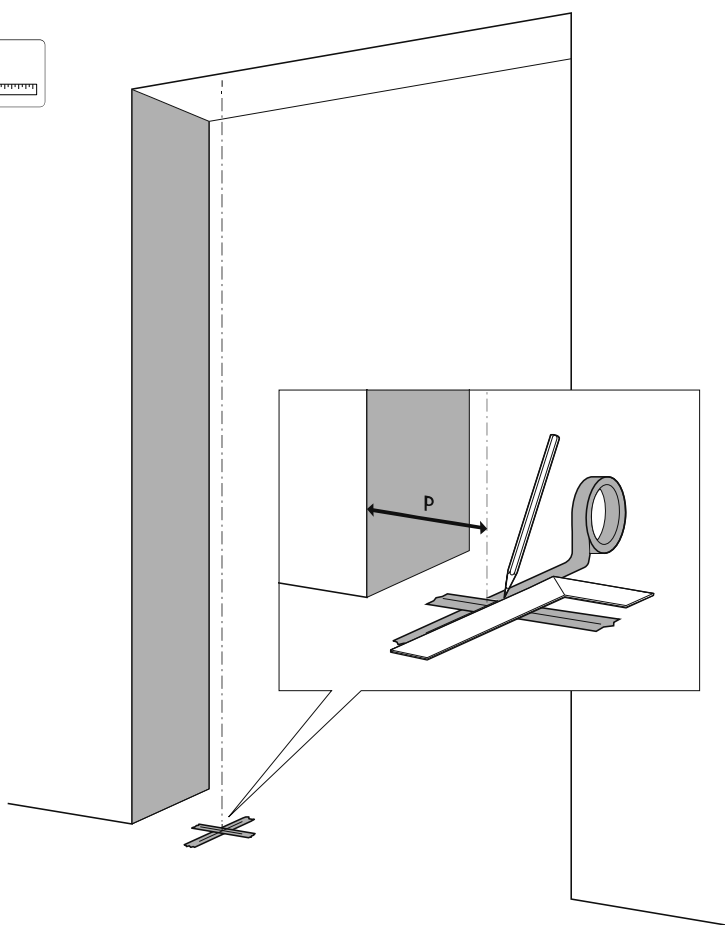


4

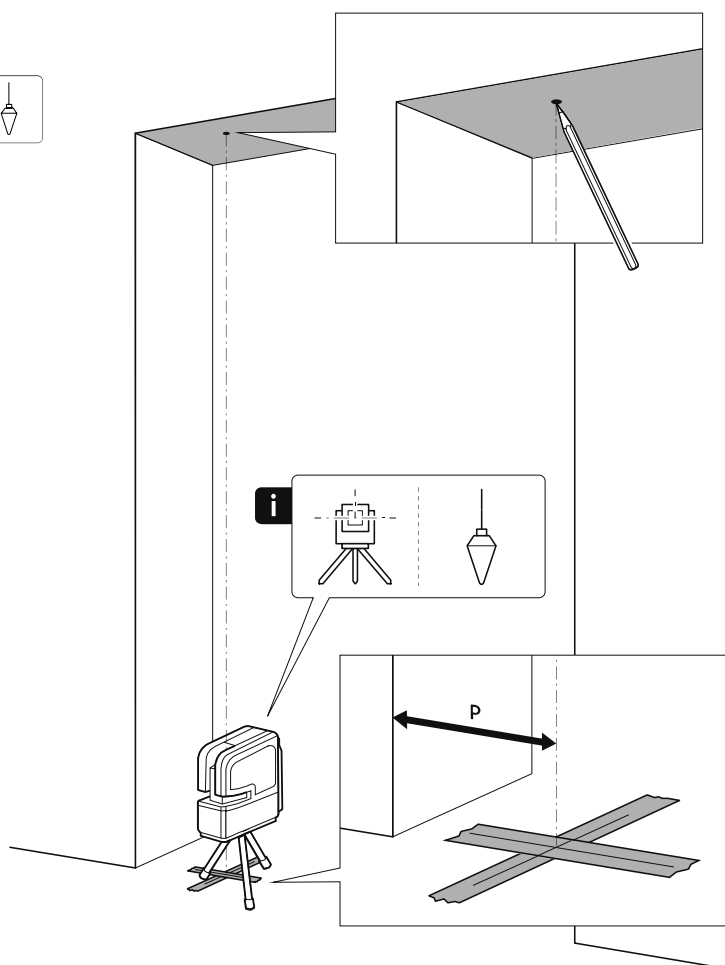


5

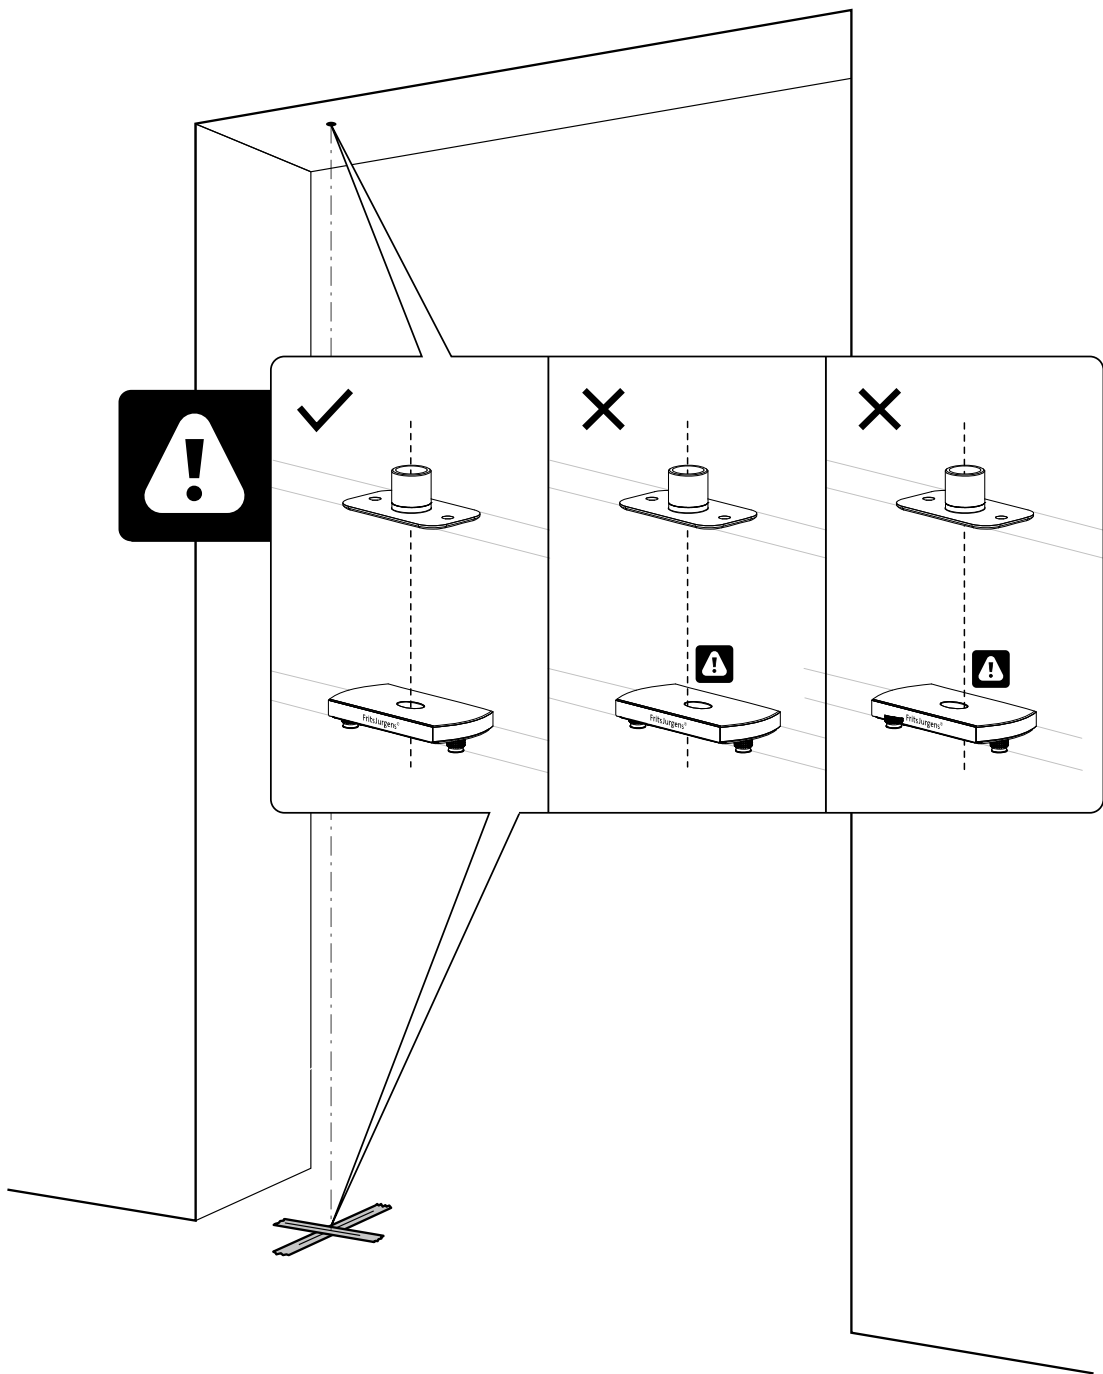


6

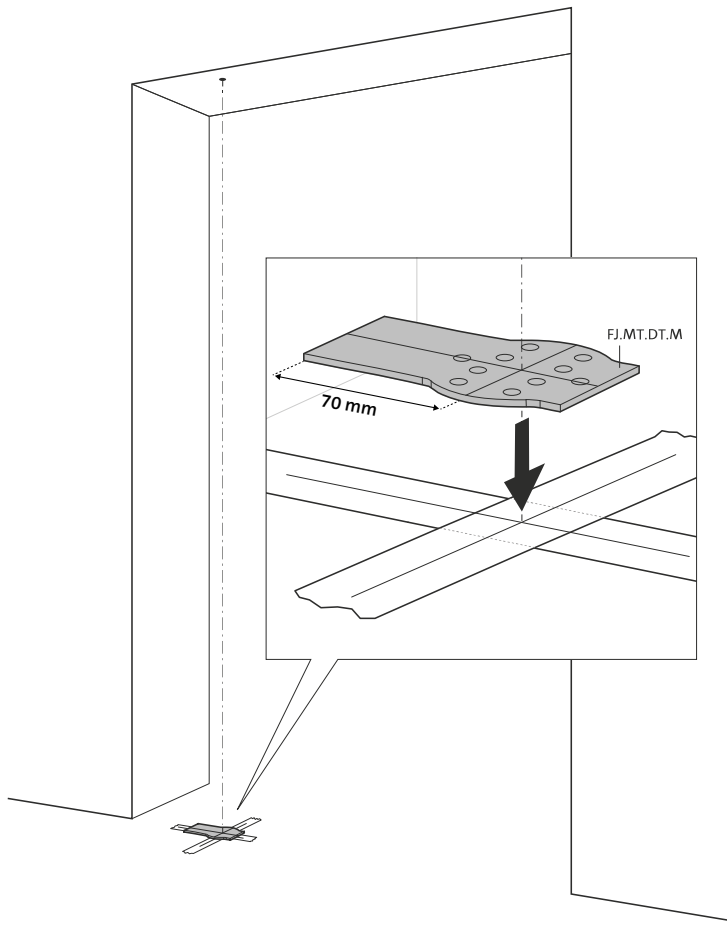


7

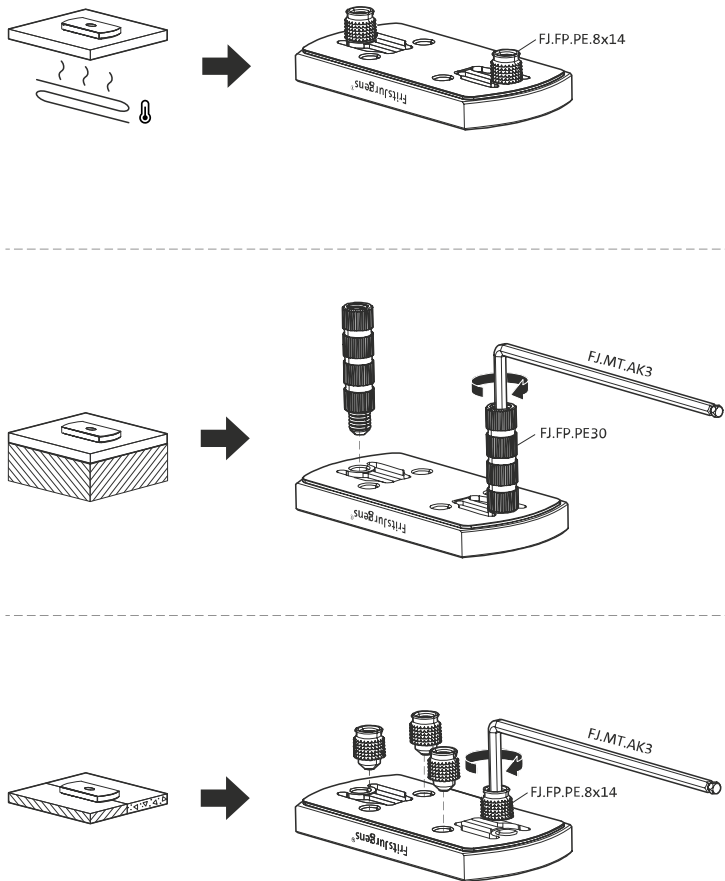


8

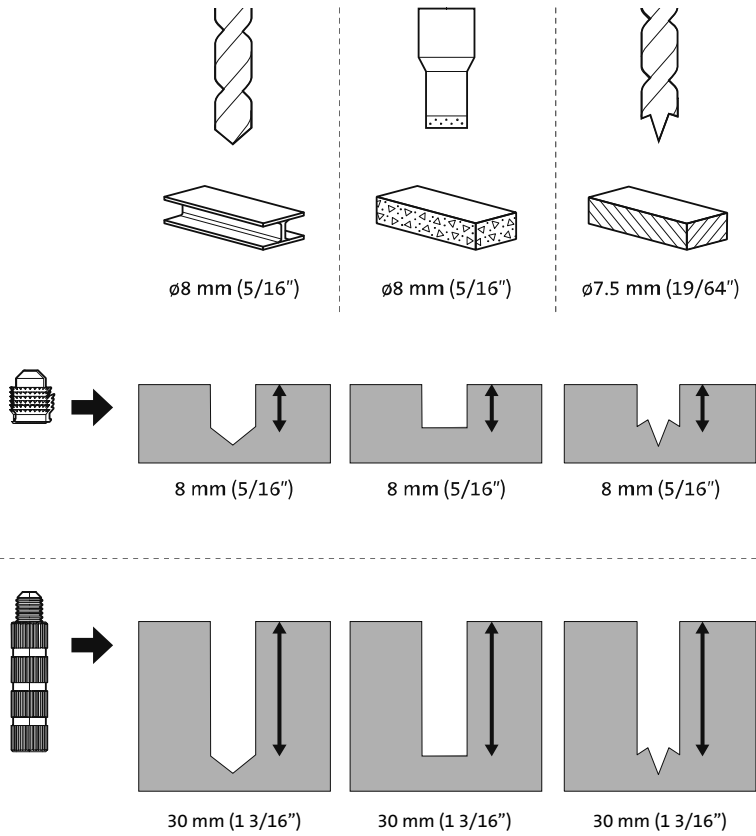

9

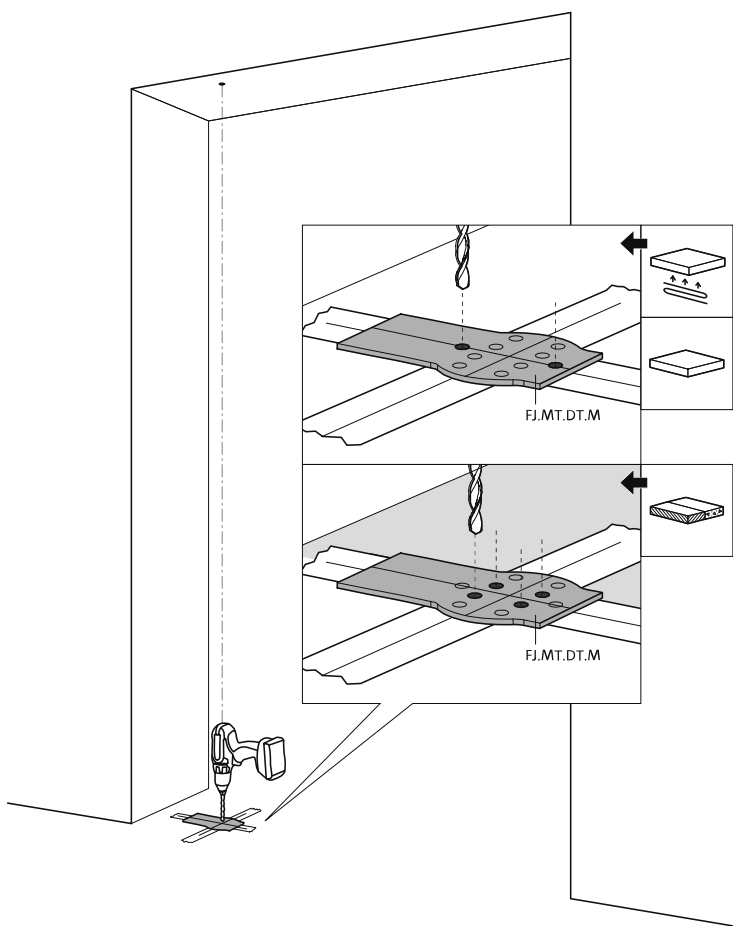


10

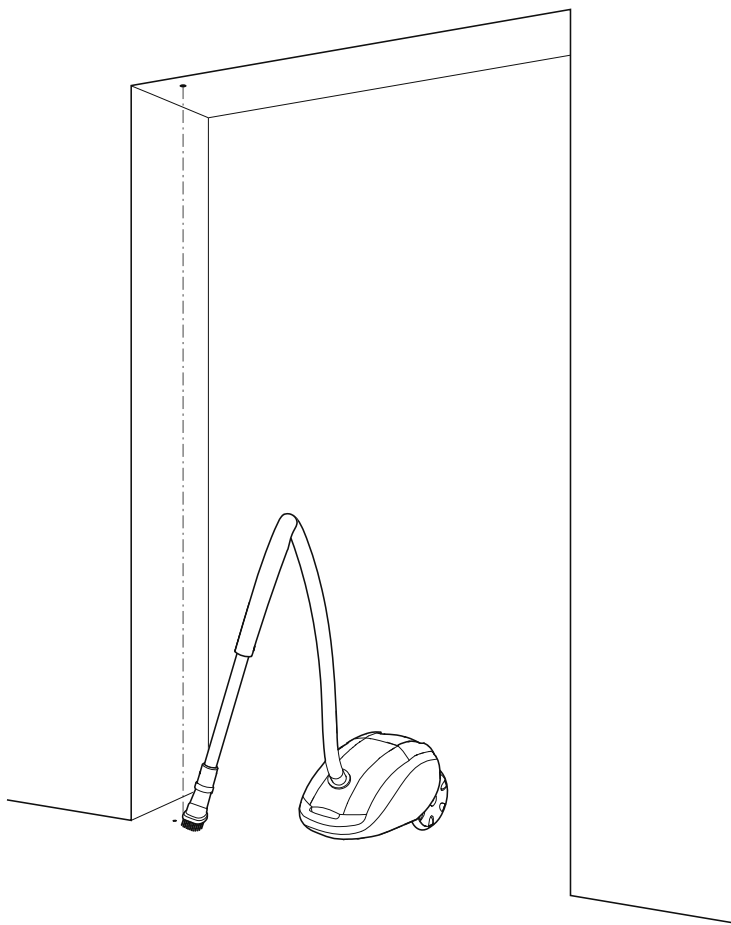


11




1

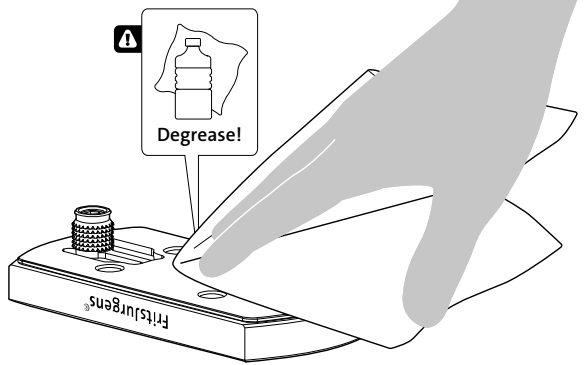



2

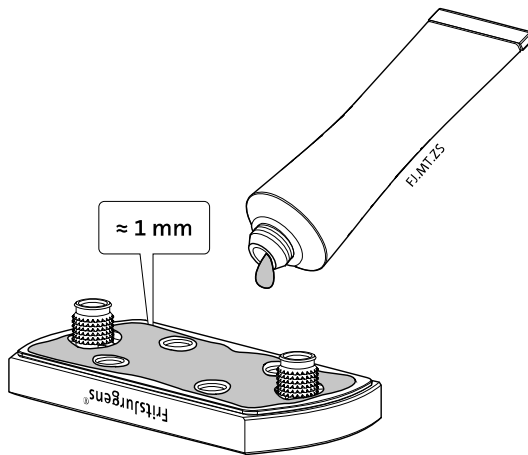



12

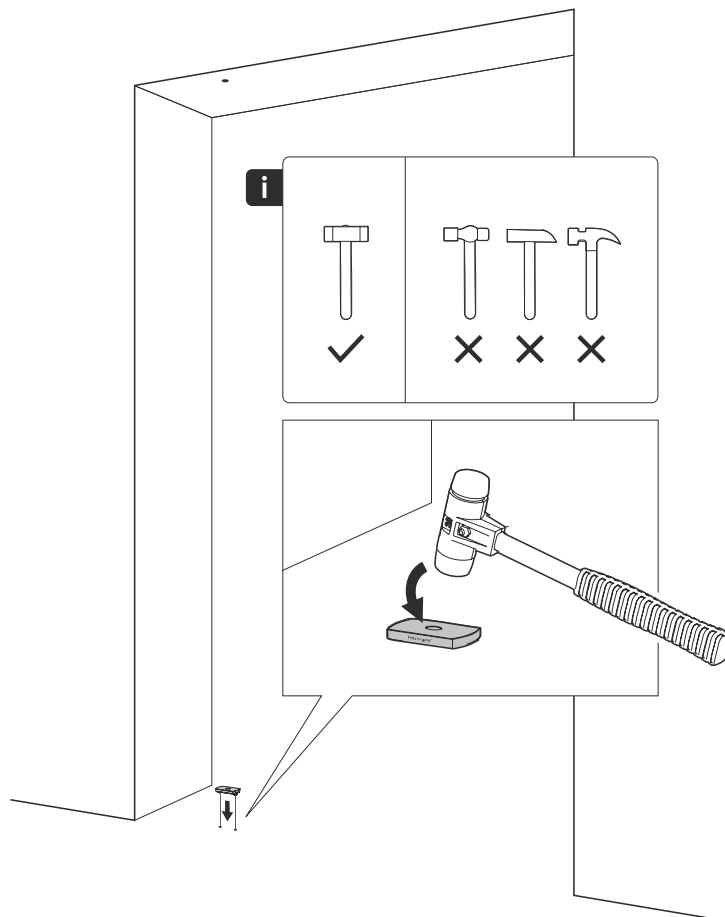


13

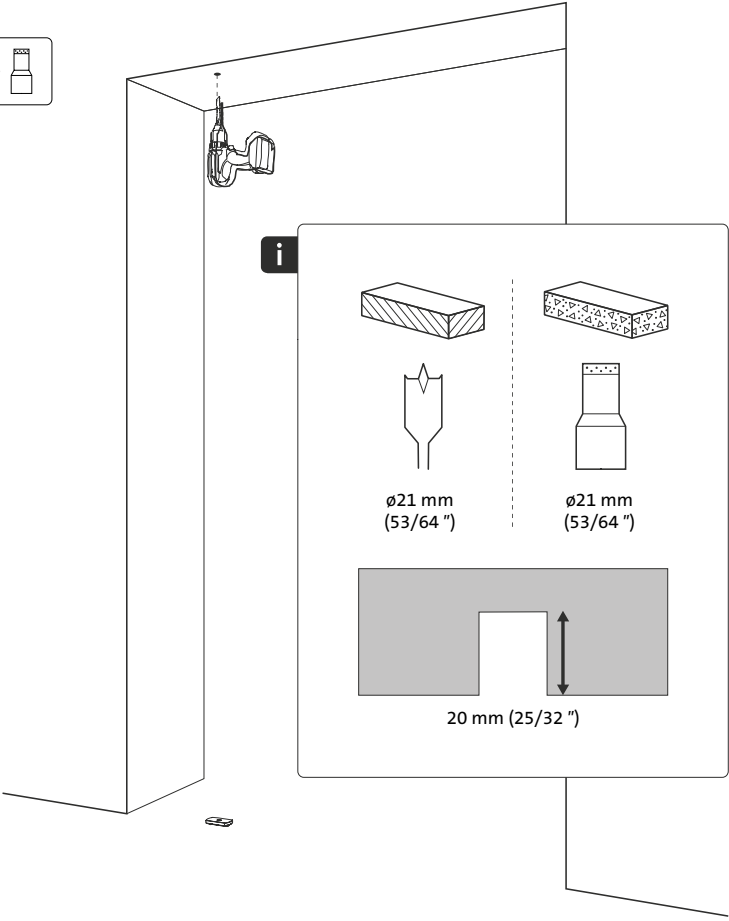


14

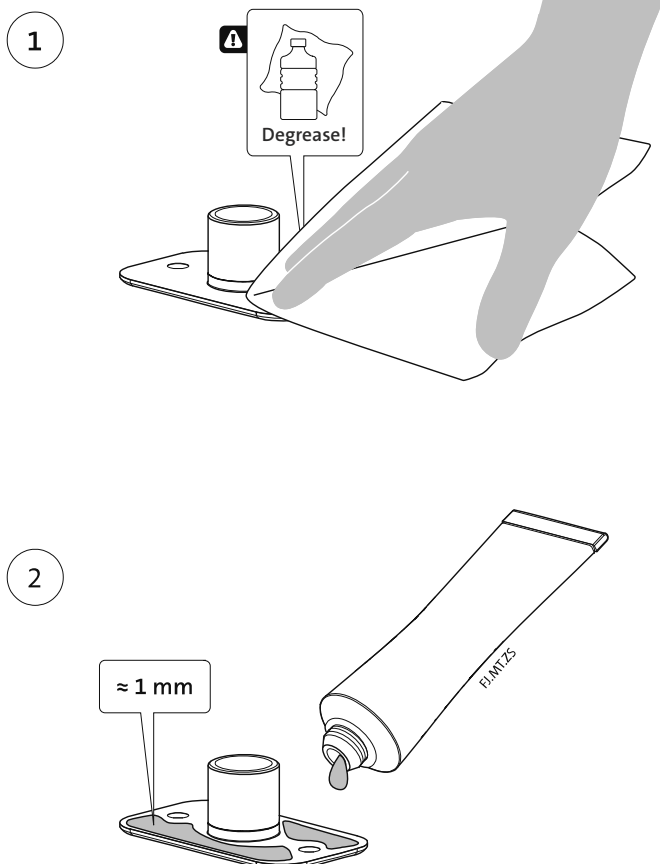
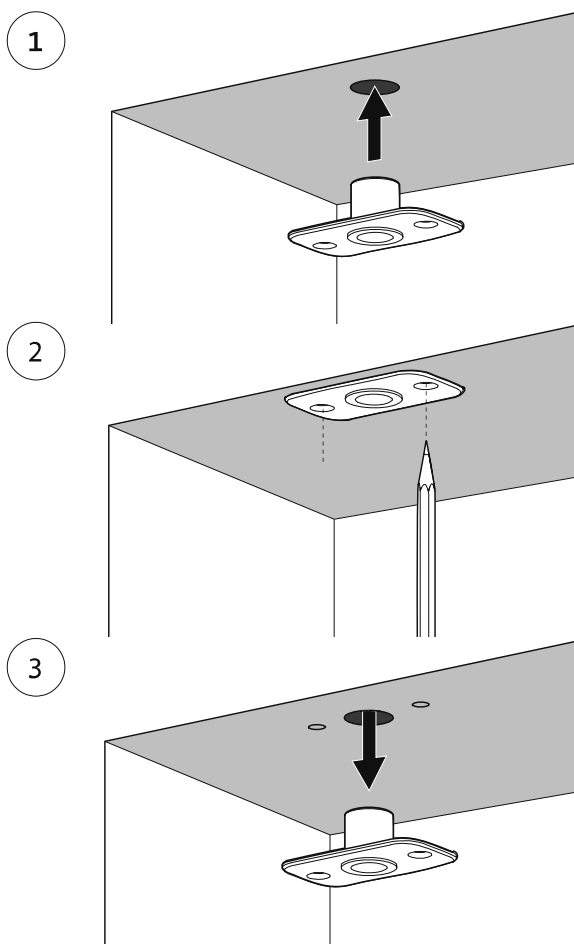


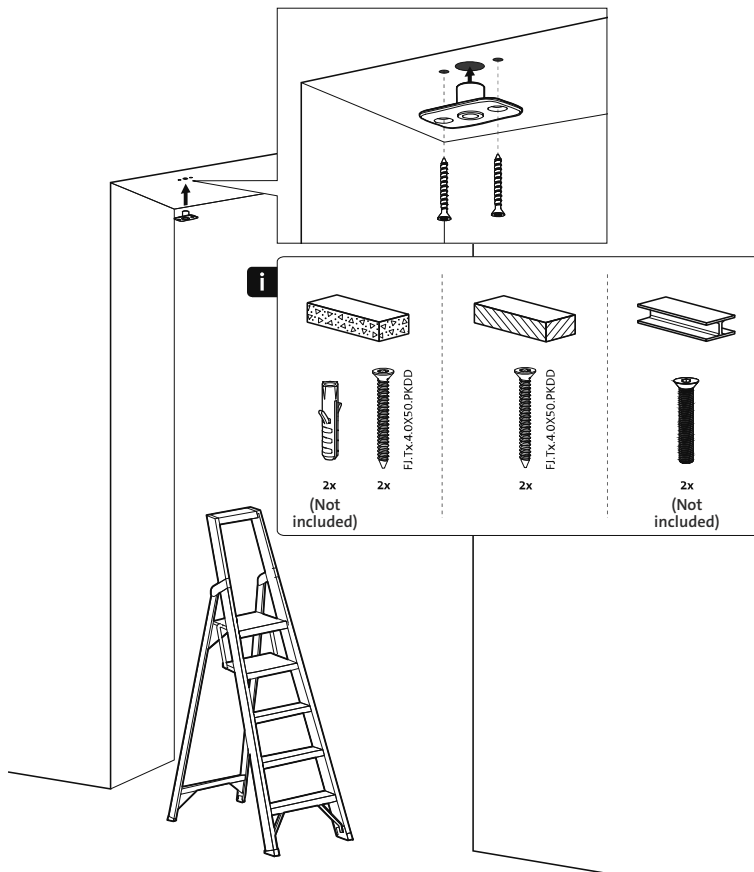




15

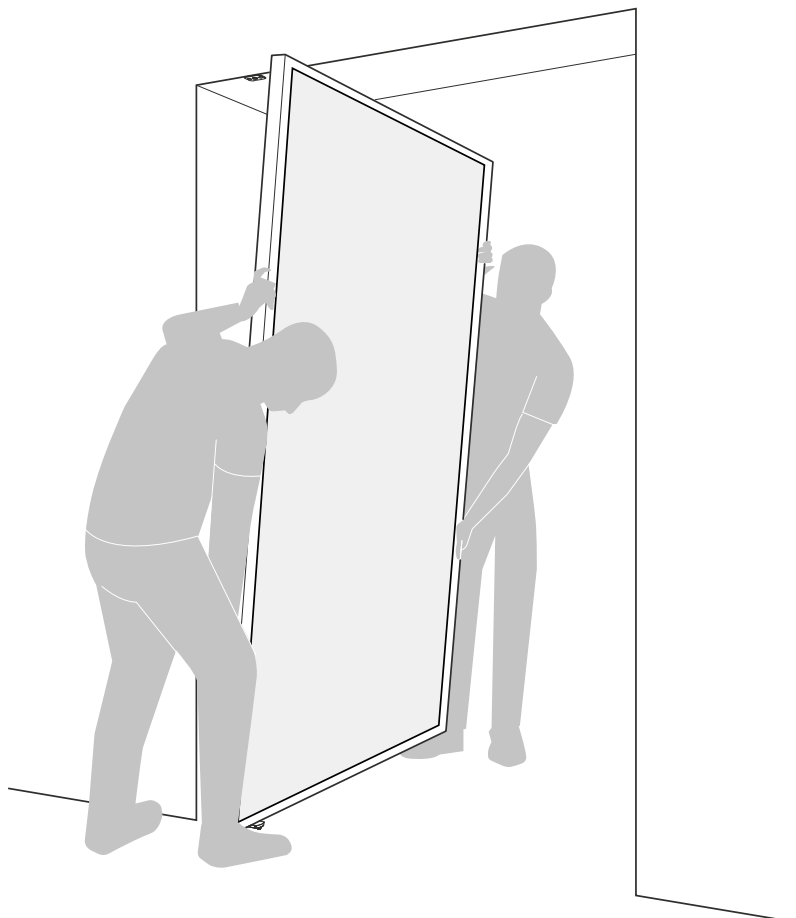


16

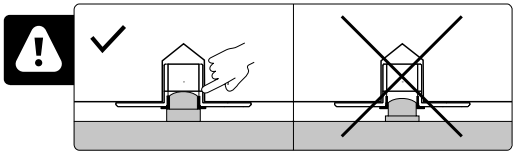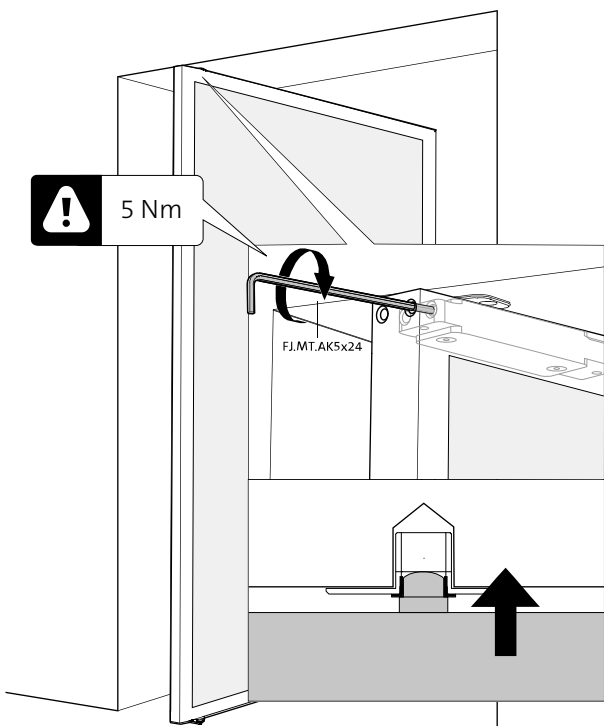


17

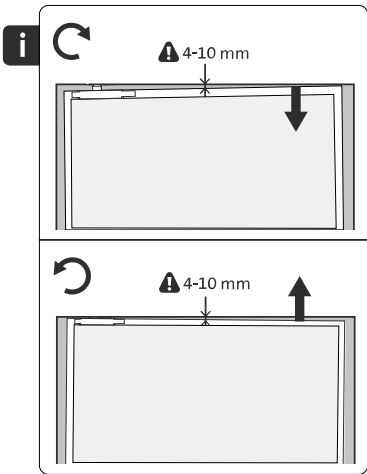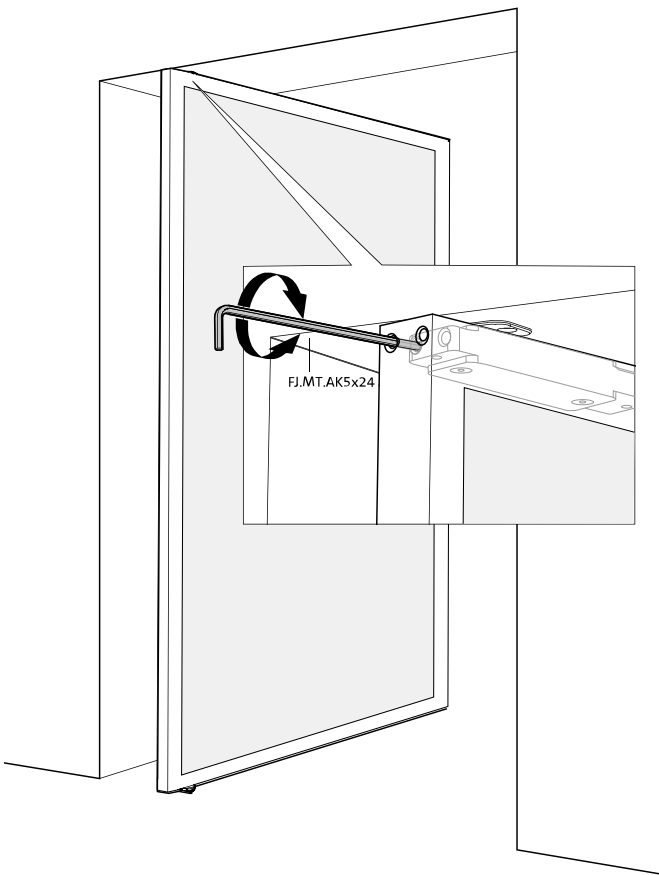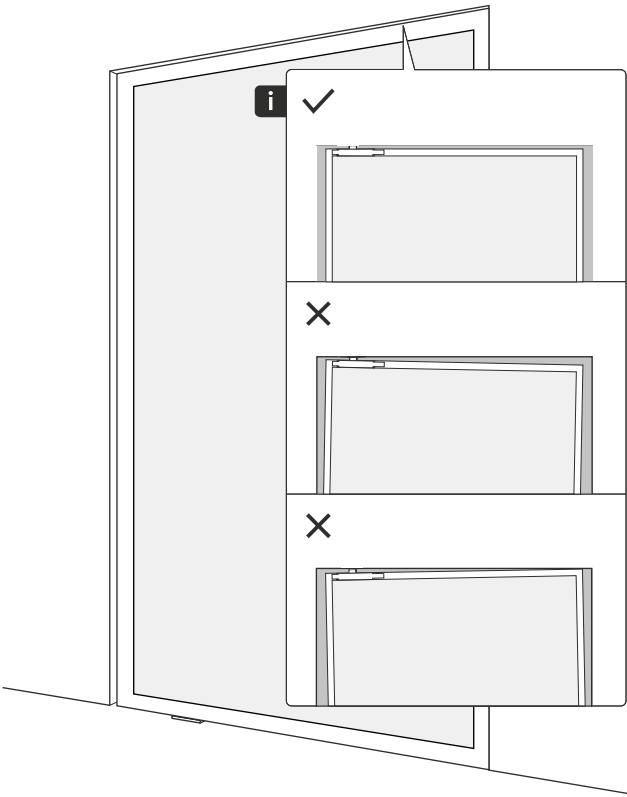


4 Disassembly instructions

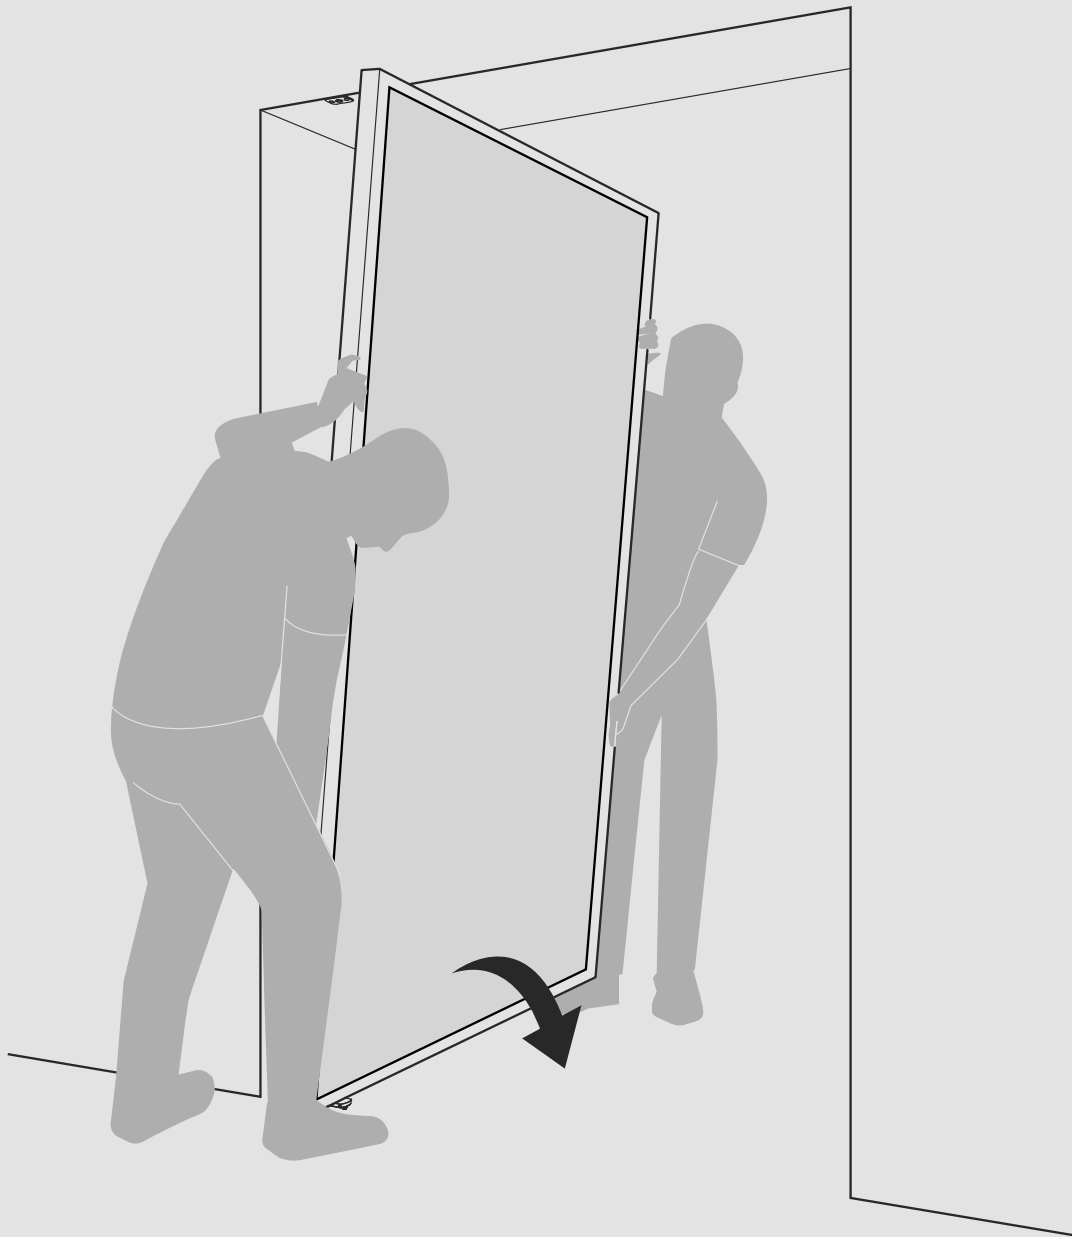


1

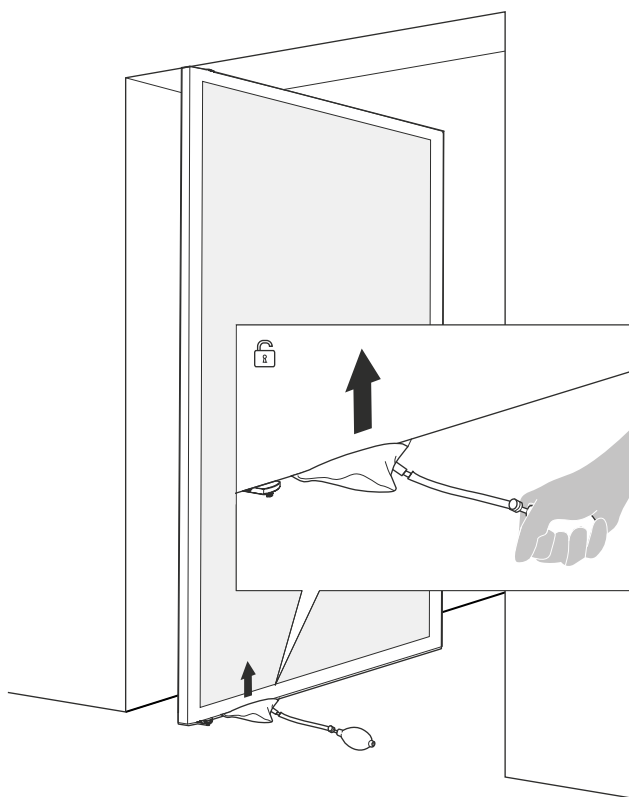

2

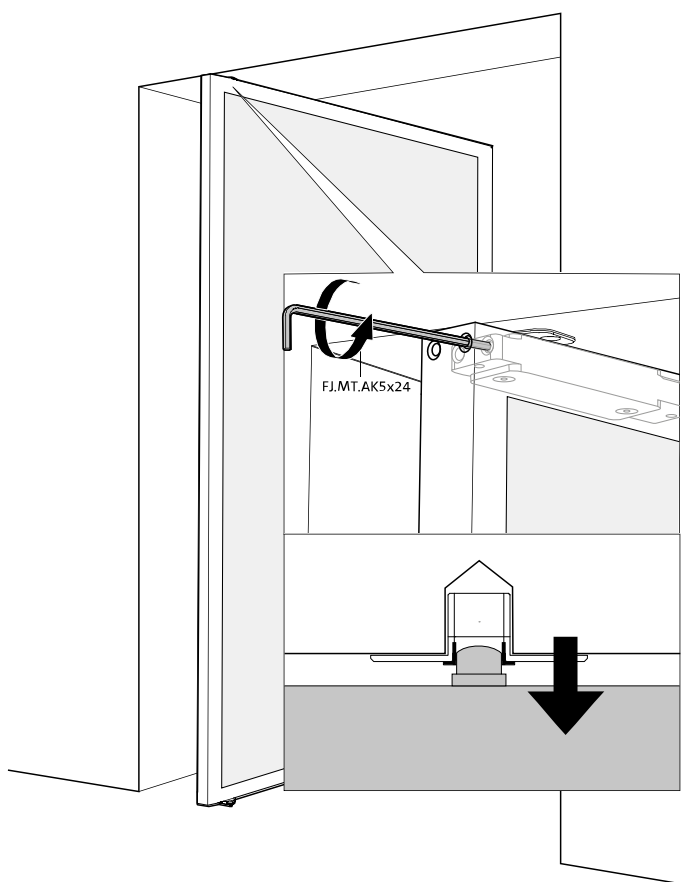

3

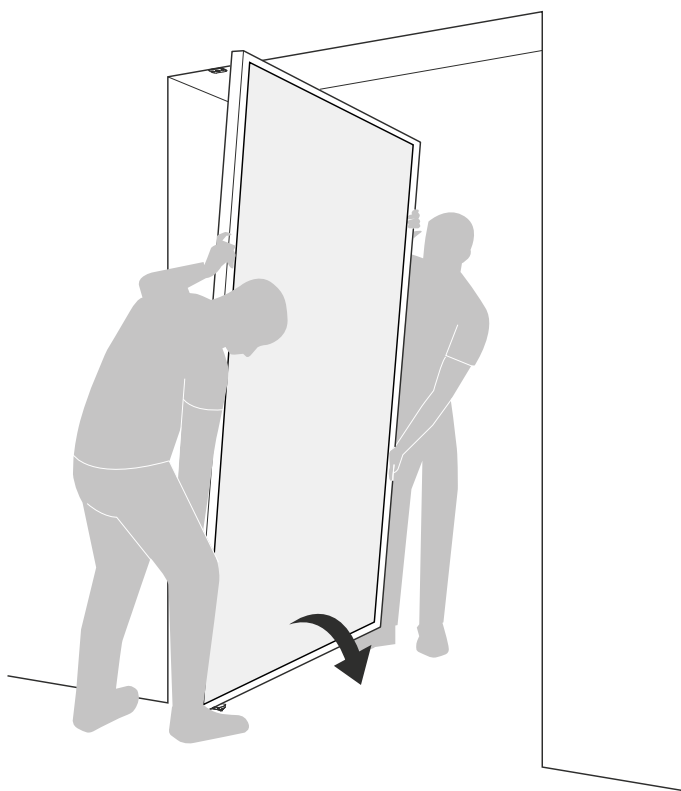

FritsJurgens B.V.

Headquarters

A. Einsteinlaan 1
9615 TE Kolham
The Netherlands
+31 598 343 410
info@fritsjurgens.com

FritsJurgens Middle East and Asia

Building A3 Unit 516/517
Dubai South
P.O. Box 713842
Dubai
United Arab Emirates
+971 4 575 8493
dubai@fritsjurgens.com

FritsJurgens North America

228 East 45th Street, Suite 9E
New York, NY 10017
United States
+1 223 307 5840
northamerica@fritsjurgens.com

fritsjurgens.com